



## Product Data Sheet

# 2202A-L

Floor mount overhead door contact with stainless steel armored cable

### Overhead Door Magnetic Contact

The Sentrol 2200 series overhead door magnetic contact is for use in the rigorous environments of commercial and industrial installations. The floor mount units are constructed with a low profile heavy cast aluminum housing. The reed switch assembly is fully encased in Sentrol's exclusive polyurethane potting material to prevent damage due to moisture or humidity.

### Easy Installation

A wide operating gap distance of up to 7.5 cm makes installation easy and helps prevent false alarms caused by door movement or damaged and loose fitting doors.

### Durability and dependability

The Sentrol high performance magnetic contacts have been designed to facilitate installation and ensure durability and dependability. Most are conservatively rated at 10,000,000 cycles, guaranteeing a long life. Every reed connection is hand soldered and each magnetic contact is tested before they leave the factory, 100% of the time.

### High quality components and materials

Reed legs are plated with rhodium or ruthenium, and hermetically sealed in dry nitrogen. This offers superior protection against sticking and provides a moisture free environment therefore preventing corrosion.



### Standard Features


- Miniature, low profile design
- Stainless steel armored cable for added security, reliability
- Wide working gap for overhead doors
- Small size less likely to be damaged by forklifts
- Optional tamper loop (depending on model)

# 2202A-L

Floor mount overhead door contact with stainless steel armored cable

## Specifications

|                        |                                     |
|------------------------|-------------------------------------|
| Gap distance (max)     | 76 mm                               |
| Connections            | 45 cm stainless steel armored cable |
| Contact                | NC                                  |
| Supervised loop        | No                                  |
| Dimensions (L x W x H) |                                     |
| Contact                | 89 x 38 x 11 mm                     |
| Magnet                 | 89 x 38 x 38 mm                     |
| Color                  | Aluminum                            |
| Magnet                 | 1958-L                              |
| Remarks                |                                     |

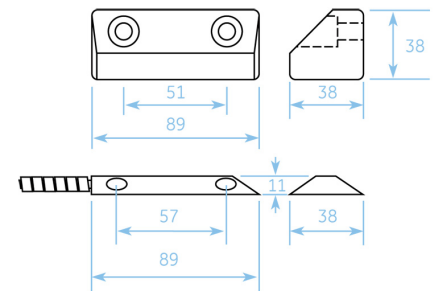

## Ordering Information

| Part No. | Description  |
|----------|--|
| 2202A-L  | Floor mount overhead door contact with stainless steel armored cable |

